


ASIA FUJI

Contact phone: 8558-3300, 7013-7300

CE / EAC

PERFECT CONSTRUCTION INTERNATIONAL LLC
EXCLUSIVE DISTRIBUTOR

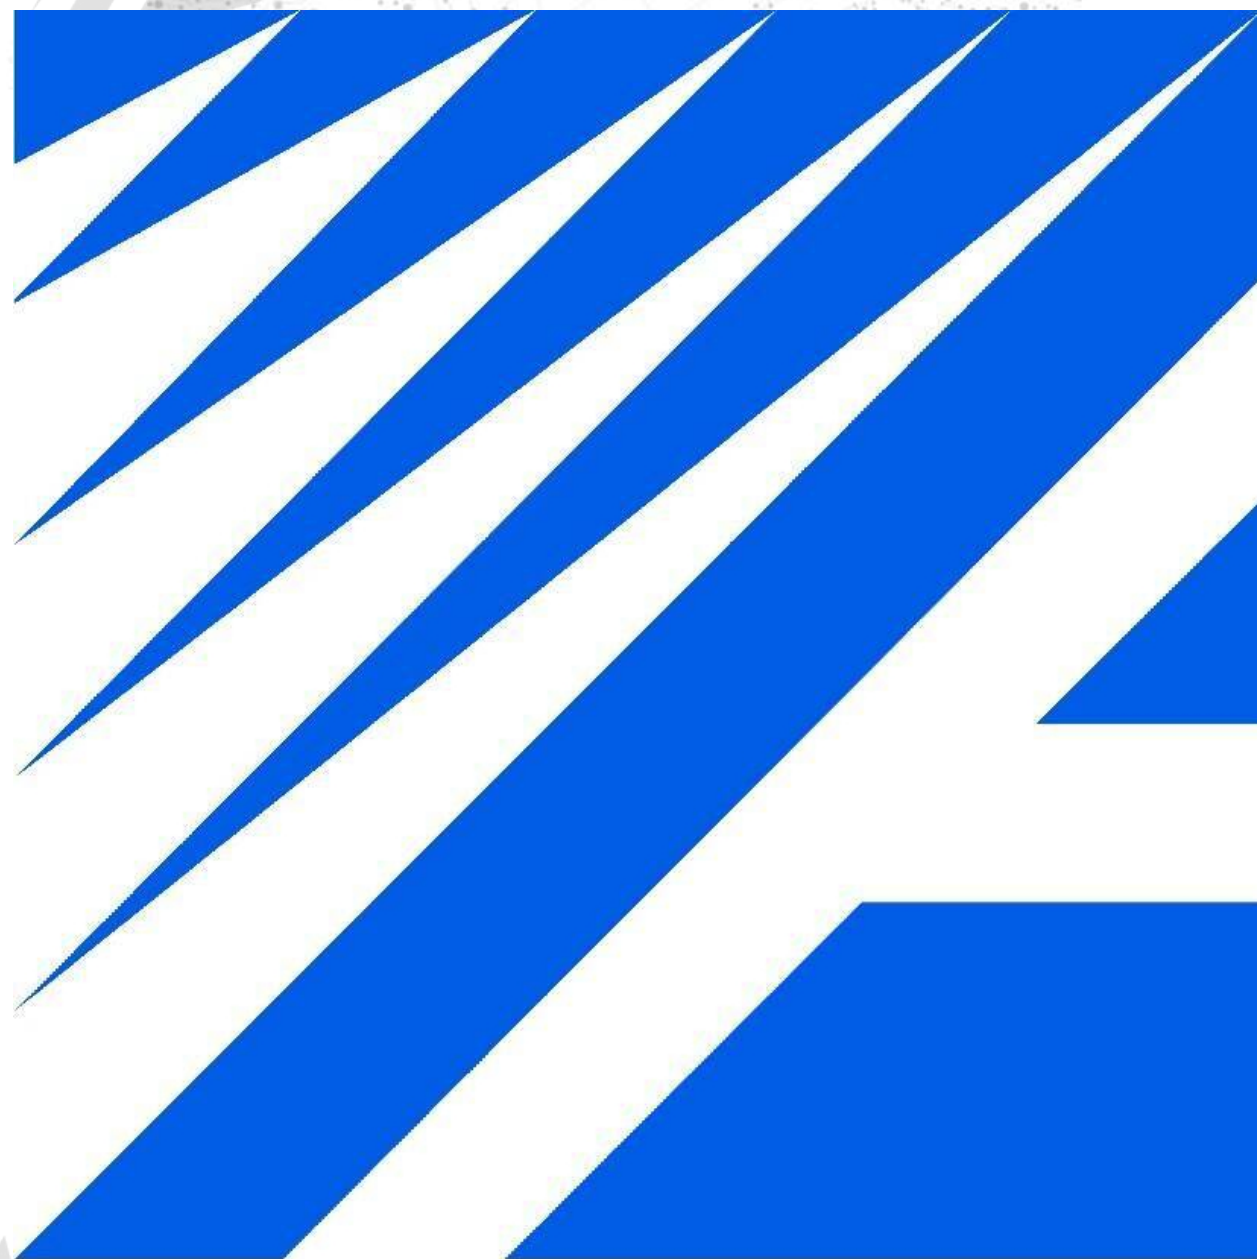

ASIA FUJI



ASIA FUJI

ASIA FUJI

ASIA FUJI

ASIA FUJI

ASIA FUJI

ASIA FUJI

ASIA FUJI

ASIA FUJI

ASIA FUJI

ASIA FUJI

ASIA FUJI

ASIA FUJI

ASIA FUJI

Company Profile

Asia Fuji is a company with nearly 3 decades history, specializing in elevators series business

Elevator series	Residence	Office Building	Hotel	Market	Hospital	Home	Public buildings	Factory
Small machine room passenger elevator	•	•	•	•	•	•	•	•
Machine roomless passenger elevator	•	•	•	•	•	•	•	•
Panoramic elevator	•	•	•	•	•	•	•	•
Home elevator						•		
Hospital elevator					•			
Freight elevator		•	•	•	•			•
Car elevator				•	•		•	
Escalator			•	•	•		•	
Moving walk					•		•	



Suzhou Asia Fuji Elevator Co., Ltd is established in the beautiful city Suzhou, we are a professional designer, manufacturer, trader, installer and maintainer of full range of elevator products, such as passenger elevator, panoramic elevator, home elevator, hospital elevator, cargo elevator, escalator and travolater.


"Asia Fuji" elevator R&D is in the charge of Asia Fuji Elevator (HK) Ltd, a strategic partner of Japan Fuji エレブーグ. As a well-known brand in the world market, "Asia Fuji" elevator has enjoyed a good reputation in domestic and overseas market with its quality&price ratio. Suzhou Asia Fuji Elevator Co., Ltd has its production base in Jiangxi Province, with more than 20 years elevator production experience, high quality production line and standard management system.

As a professional elevator supplier, Suzhou Asia Fuji Elevator Co., Ltd is not only an equipment supplier. From the time of its establishment, we position ourselves at the front line of international competition; actively participate in the marketing with new vision. As to the complicated and high requirement elevator project, we innovate the idea of "elevator packaging solution supply", tailor making the high quality product to meet customers' demands. Suzhou Asia Fuji Elevator Co., Ltd persistently aims to bring superior quality elevator product, excellent service and enhance the purchasing value for customers from all round.

Comfort Travelling & Safety Guarantee

Intelligent group control & reasonable arrangement

Intelligent group control management system, which may forecast future usage, is able to realize the future target path control algorithm by using high-performance 32-bit microprocessor and knowledge processing application technology. Under the support of this algorithm, the daily usage will be studied, taking into account future prediction factors. A target path is created, and a landing call distribution control that conforms to the target path is implemented. When the LOP button is pressed, the most appropriate elevator is selected from a plurality of elevators by predicting the target route control, and the order is assigned to the elevator.

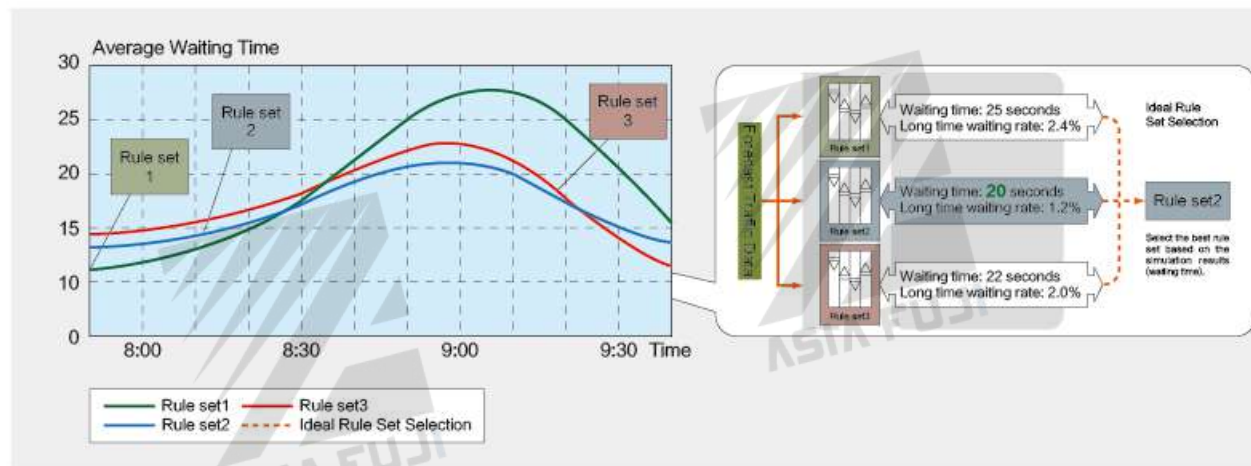

High anti-collision strength of landing door system

All landing door system of Asia Fuji Elevators have passed the anti-collision test, which exceeds the national standard request, with high anti-collision strength.



Automatic rescue device(ARD)

If power off when the elevator is running, it may automatically switch to battery to let the elevator go to the nearest floor, ensuring passengers leave the elevator safely.



Integrated control system

The new generation of intelligent vector-type integrated control system is the perfect combination of modern industrial control technology, communication technology and traditional elevator. Compared with traditional elevator control, it's more cost-effective and more convenient to maintain.




New generation door operator system

Advanced VVVF(variable voltage variable frequency) control technology is applied to the elevator door operator system to ensure smooth and quiet switch of the doors; improve the sensitivity of the door switch and adjust the most suitable switching speed of each floor automatically, to ensure safe and reliable travelling.



Three major security components


When the elevator exceeds the standard rated speed, speed governor will act to cut off the safety circuit to ensure the elevator stop running. When the elevator exceeds the standard speed, safety gear is actuated by the linkage of speed governor to ensure the elevator stop safely. It absorbs abnormal impact energy to greatest extent. Therefore, it guarantees the passengers' safety in elevator.

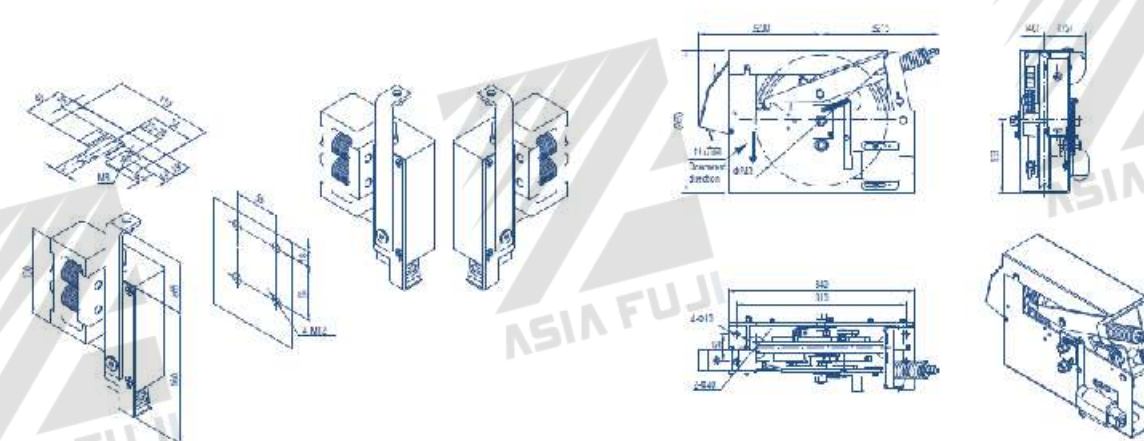

Green Drive, Energy Saving And Environmental Protection

A new generation of permanent magnet synchronous gearless traction machine

A new generation of permanent magnet synchronous gearless traction machine, which uses rare earth materials, fully integrates coaxial transmission technology, digital frequency conversion technology and group computer combination control technology, with low operating cost and low energy loss.

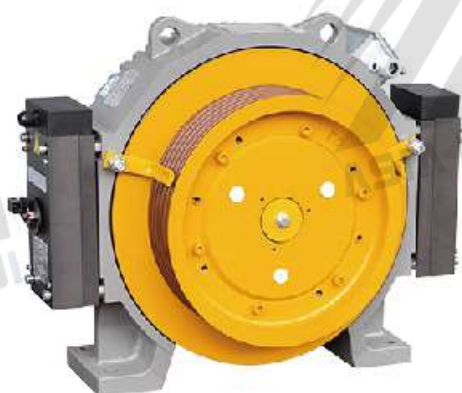

Light curtain door protection system

A light curtain barrier is formed at the door of the elevator, and 94 infrared beam protection can respond sensitively to any person or object entering the cabin, and then door operator may restart quickly to avoid clamping persons, ensuring high safety performance standard.




Professional accreditation


Measurements taken on ASIA FUJI installation with standard configurations have the highest efficiency class rating. So when you add it all up-technologically and environment. The ASIA FUJI elevator system is clearly at the top of its class.



LED lighting system

Cabin lighting adopts LED lighting, traditional fluorescent lamp is 60W, but LED only need 10W to achieve the same illumination.

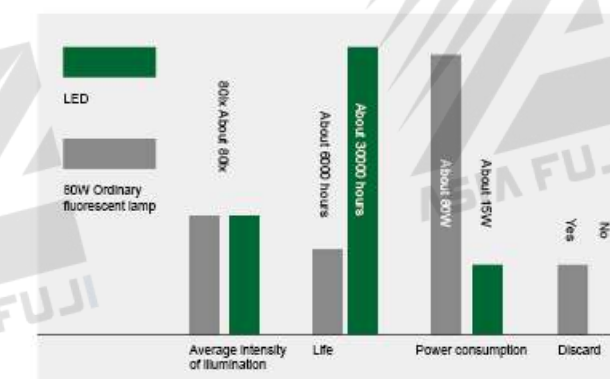

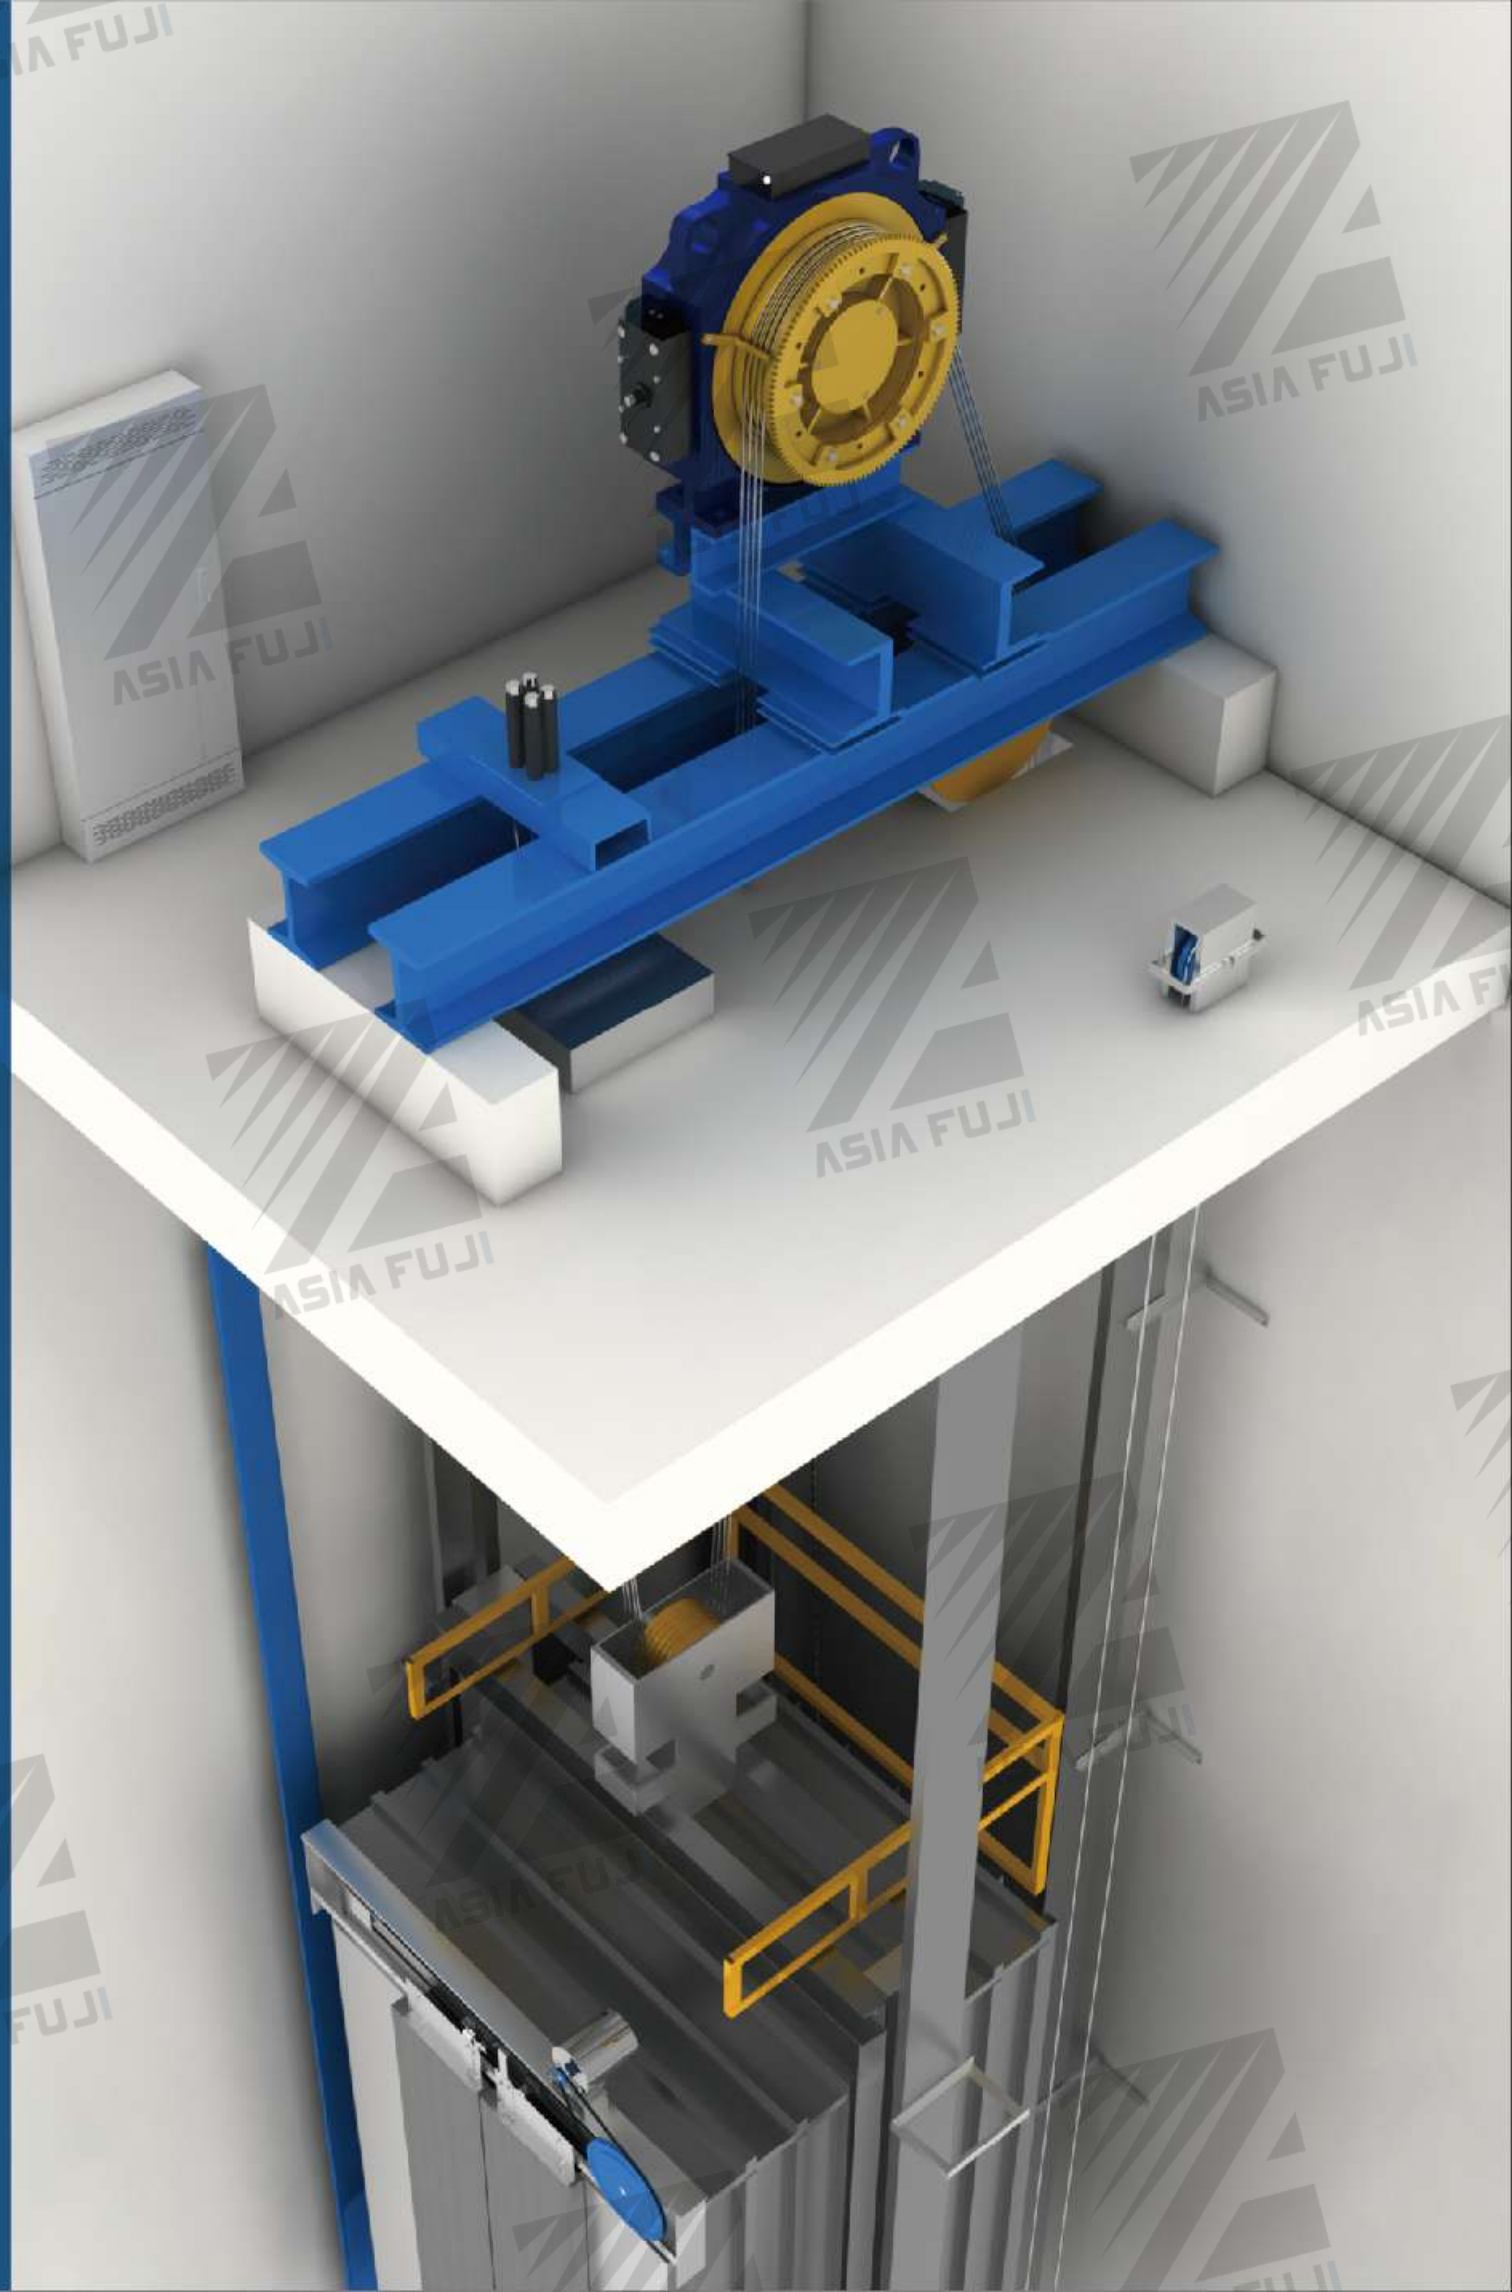

Small Machine Room Passenger Elevator

Effectively save space in the machine room,
Stable, safe & high efficient.

High quality & outstanding appearance

Elevators play an indispensable role in today's booming construction industry. Asia Fuji Elevators are with high-quality, combines excellent performance and comfort. We're the best choice for residential, commercial, office building, commercial center, hotels and etc.

Reasonable civil construction layout

Reduce 250mm height of machine room, keep size of machine room and shaft the same, to reserve more space for the building.



Machine Roomless Passenger Elevator

Save energy and reduce floor area to achieve space freedom.

Easily integrate into the building and enhance value of it

MRL structure, set controller cabinet & traction machine into the shaft, which saves the building area and makes it simple and nice. Also leaving more space for architects and developers, reducing construction cost.

Energy & space saving

Based on the standard of "Energy Saving", fully considering the utilization rate and cost of building space, using a compact layout and flexible design style, integrated into various buildings, becoming the best choice for modern buildings.



Passenger Elevator Car Decoration



SFJ-J101

Ceiling: Hairline Stainless Steel, Acrylic Lighting, LED Lights
Cabin Wall : Hairline Stainless Steel

Handrail : None
Floor : PVC



SFJ-J102


Ceiling: Hairline Stainless Steel, Acrylic Lighting
Cabin wall: Hairline Stainless Steel, Mirror-Etched
Stainless Steel
Handrail : Flat Tube Stainless Steel
Floor : PVC



SFJ-J103

Ceiling: Hairline Stainless Steel, Acrylic Lighting, LED lights
Cabin wall: Hairline Stainless Steel, Mirror Stainless Steel,
Mirror-Etched Stainless Steel
Handrail: Single Tube Stainless Steel
Floor : PVC

Passenger Elevator Car Decoration

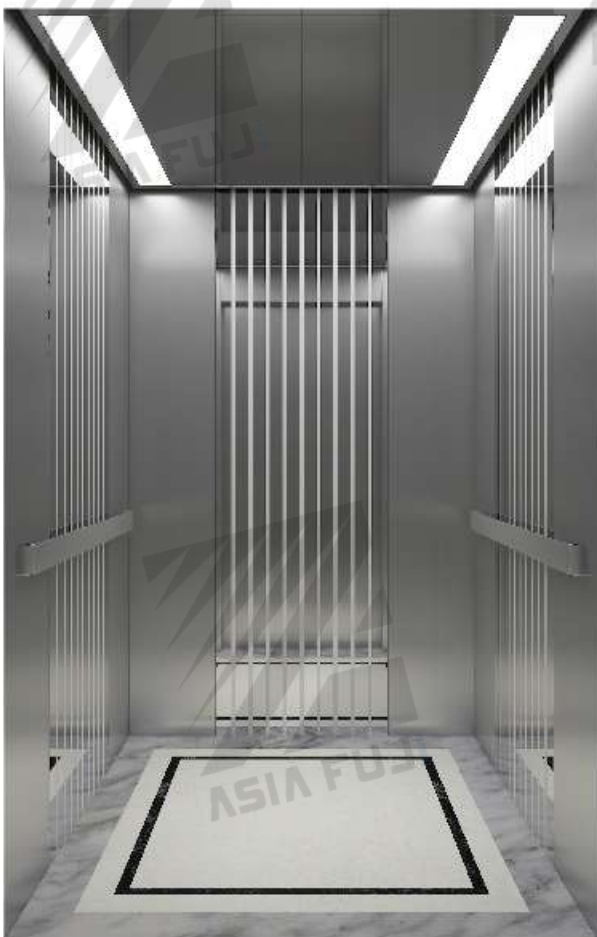

SFJ-J104



Ceiling: Hairline Stainless Steel, Acrylic Lighting, LED Lights

Cabin Wall: Hairline Stainless Steel, Mirror-Etched

Stainless Steel

Handrail : Flat Tube Stainless Steel

Floor : PVC

SFJ-J105

Ceiling: Hairline Stainless Steel, Acrylic Lighting, LED lights

Cabin wall: Hairline Stainless Steel, Mirror Stainless Steel

Handrail : Single Tube Stainless Steel

Floor : PVC

SFJ-J106

Ceiling: Hairline Stainless Steel, Acrylic Lighting, LED Lights

Cabin Wall: Hairline Stainless Steel, Mirror Stainless Steel

Handrail : Flat Tube Stainless Steel

Floor : PVC

SFJ-J107

Ceiling: Hairline Stainless Steel, Acrylic Lighting


Cabin wall: Hairline Stainless Steel, Mirror-Etched

Stainless Steel

Handrail : Single Tube Stainless steel

Floor : PVC

Passenger Elevator Car Decoration

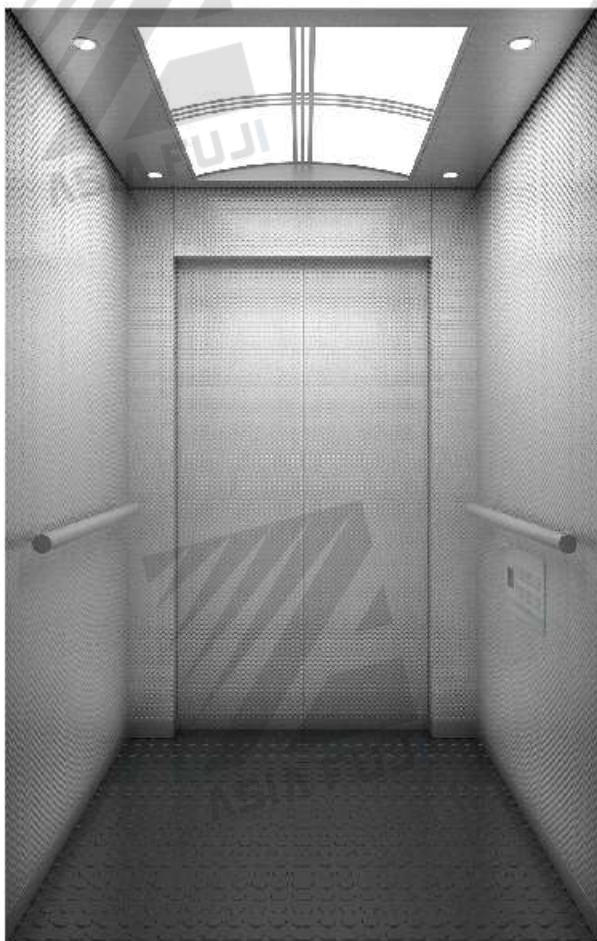

SFJ-J108



Ceiling: Hairline stainless steel, acrylic lighting,
LED lights
Cabin walls: Stainless steel pattern plate
Handrail: Single Tube Stainless steel
Floor: Anti-slippery PVC

SFJ-J109



Ceiling: Mirror Stainless Steel, Acrylic Lighting, LED lights
Cabin Wall: Hairline Stainless Steel,
Mirror-Etched Stainless Steel
Handrail : Single Tube Stainless steel
Floor : PVC

SFJ-J110



Ceiling: Mirror Stainless Steel, Acrylic Lighting, LED Lights
Cabin wall: Hairline Stainless Steel, Mirror-Etched
Stainless Steel
Handrail : Single Tube Stainless steel
Floor : PVC

SFJ-J111

Ceiling: Mirror Stainless Steel, Acrylic Lighting, LED Lights
Cabin Wall: Hairline Stainless Steel, Mirror-Etched
Stainless Steel
Handrail : Double tube stainless steel
Floor : PVC

Passenger Elevator Car Decoration



SFJ-J112

Ceiling: Hairline Stainless Steel, Acrylic Lighting
Cabin Wall: Hairline Stainless Steel, Mirror-Etched
Stainless Steel, Partial silver
Handrail : Single Tube Stainless steel
Floor : PVC




SFJ-J113

Ceiling: Mirror Stainless Steel, Acrylic Lighting, LED Lights
Cabin Wall: Hairline Stainless Steel, Mirror-Etched
Stainless Steel
Handrail : Flat Tube Stainless Steel
Floor : PVC



SFJ-J114

Ceiling: Titanium Mirror Stainless Steel, Acrylic Lighting
Cabin Wall : Titanium, Mirror Stainless Steel,
Hairline Stainless Steel, Etched
Handrail : Single Tube Titanium Stainless Steel
Floor : PVC

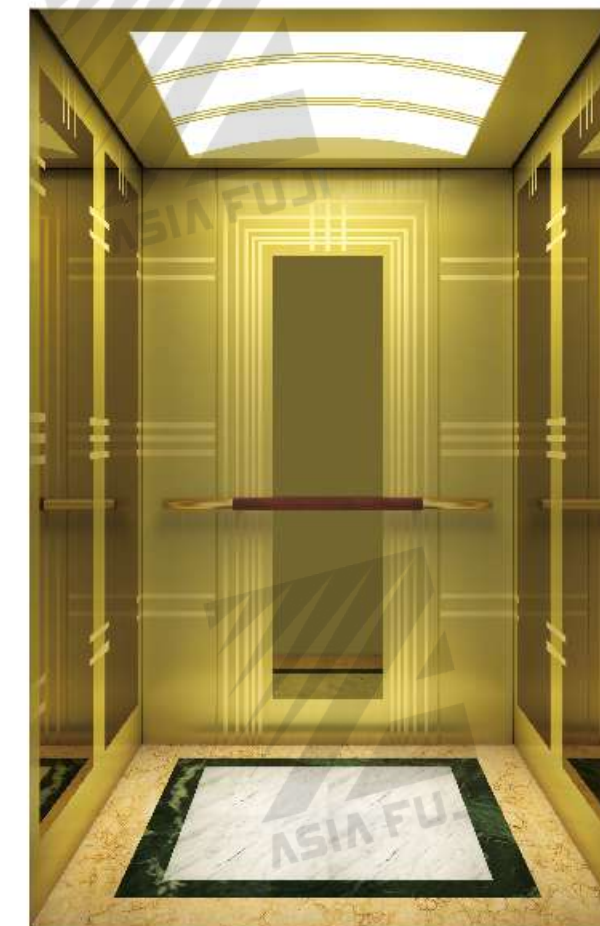

SFJ-J115

Ceiling: Titanium Mirror Stainless Steel, Acrylic Lighting
Cabin wall : Titanium, Mirror Stainless Steel,
Hairline Stainless Steel , Etched
Handrail : Titanium Stainless Steel & Wood
Floor : PVC

Passenger Elevator Car Decoration



SFJ-J116



Ceiling: Titanium Mirror Stainless Steel, Titanium Mirror Etched, Marble
Cabin Wall: Titanium Mirror Etched, Titanium Hairline Stainless Steel, Titanium Mirror Etched
Handrail : Titanium Stainless Steel& Wood
Floor : PVC



SFJ-J117

Ceiling: Titanium Mirror Stainless Steel, Acrylic Lighting, LED Lights
Cabin wall : Titanium Mirror Stainless Steel, Titanium Hairline Stainless Steel
Handrail : Flat Tube Titanium Stainless Steel
Floor : PVC



SFJ-J118

Ceiling: Champagne Gold Mirror Stainless Steel, Acrylic Lighting, Led Lights
Cabin Wall : Mirror Etched Stainless Steel, Champagne Gold Hairline Stainless Steel
Handrail : None
Floor : PVC



SFJ-J119



Ceiling: Titanium Mirror Stainless Steel, Titanium Mirror Etched Stainless Steel, Decorative Light, LED Lights
Cabin Wall : Titanium Mirror Etched Stainless Steel, Titanium Mirror Stainless Steel, Marble
Handrail : Titanium Stainless Steel and Wood
Floor : PVC

Panoramic Elevator


A perfect combination of comfort and visual beauty.
Known as a moving piece of art on a building.

Watch the city as a panoramic view

We strive to make products have a super visual beauty and become the most dazzling scenery in your entire building. Let it be a radiant, interpretation of the noble example when night falls. This series of products can be used in high-end business hotels, high-end office buildings, airports, stations and other public transportation that require sightseeing.

Variety designs

Variety cabin designs for your choices.



Semicircular



Diamond type



Square type



Prospect type

The blue line in the figure is transparent glass for sightseeing.

Panoramic Elevator Car Decoration



SFJ-G101

Upper and Lower Cover: Hairline Stainless Steel
Sightseeing Wall: Tempered Safety Glass
Decorative Ceiling: Mirror Stainless Steel,
Acrylic Lighting, LED Lights
Cabin wall: Hairline Stainless Steel Frame & Glass
Handrail: Single Tube Stainless Steel
Floor: PVC



SFJ-G102

Upper and Lower Cover: Hairline Stainless Steel
Sightseeing Wall: Tempered Safety Glass
Decorative Ceiling: Hairline Stainless Steel Frame,
Acrylic Lighting
Cabin Wall: Hairline Stainless Steel Frame & Glass
Handrail: Single Tube Stainless Steel
Floor: PVC



SFJ-G105

Upper and Lower Cover: Painted Stainless Steel,
Acrylic Cover, Acrylic Lighting
Sightseeing Wall: Tempered Safety Glass
Decorative Ceiling: Hairline Stainless Steel,
Acrylic Lighting, LED Lights
Cabin wall: Hairline Stainless Steel Frame & Glass
Handrail: Single Tube Stainless Steel
Floor: PVC



SFJ-G106

Upper and Lower Cover: Painted Stainless Steel, Acrylic Lighting
Sightseeing Wall: Tempered Safety Glass
Decorative Ceiling: Titanium Mirror Stainless Steel,
Acrylic Lighting
Cabin Wall: Titanium Mirror Stainless Steel
Handrail: Single Tube Stainless Steel
Floor: PVC



SFJ-G103

Upper and Lower Cover: Titanium Hairline
Stainless Steel
Sightseeing Wall: Tempered Safety Glass
Decorative Ceiling: Titanium Mirror Stainless Steel,
Acrylic Lighting, LED Lights
Cabin Wall: Titanium Mirror Stainless Steel & Glass
Handrail: Titanium stainless steel single tube
Floor: PVC



SFJ-G104

Upper and Lower Cover: Hairline Stainless Steel,
Mirror Stainless Steel
Sightseeing Wall: Tempered Safety Glass
Decorative Ceiling: Hairline Stainless Steel,
Mirror Stainless Board , LED Lights
Cabin wall: Hairline Stainless Steel Frame & Glass
Handrail: Single Tube Stainless Steel
Floor: PVC



SFJ-G107

Upper and Lower Cover: Titanium Hairline Stainless Steel
Sightseeing Wall: Tempered Safety Glass
Decorative Ceiling: Titanium Mirror Stainless Steel,
Acrylic Lighting, LED Lights
Cabin wall: Titanium Mirror Stainless Steel & Glass
Handrail: Titanium stainless steel single tube
Floor: PVC



SFJ-G108

Upper and Lower Cover: Black titanium hairline
etched stainless steel
Sightseeing Wall: Tempered Safety Glass
Decorative Ceiling: Black titanium Stainless Steel,
Acrylic Lighting, LED Lights
Cabin wall: Black titanium Stainless Steel & Glass
Handrail: Black titanium hairline Stainless steel three tube
Floor: PVC



Hospital Elevator



Caring your life

Hospital elevators are not only used to transport passengers, but also have special and strict requirements for the performance due to the special usage. Hospital elevators can run smoothly and comfortably. Creating a quiet, elegant space for the passengers.

Hospital Elevator Car Decoration



SFJ-Y101

Ceiling: Hairline stainless steel, acrylic lighting decoration, LED lighting

Car walls: Hairline stainless steel

Handrail: Flat stainless steel

Floor: PVC floor



SFJ-Y102

Ceiling: Hairline stainless steel, acrylic lighting decoration, LED lighting

Car walls: Hairline stainless steel

Handrail: Flat stainless steel

Floor: PVC floor



SFJ-C201

Panel Material: Hairline Stainless Steel

Button: Stainless Steel

Screen: Multimedia Display

Integrated COP

Human Machine Interface

Standard option


SFJ-C101

Panel Material: Hairline Stainless Steel

Button: Stainless Steel

Screen: LCD Display

Panel material

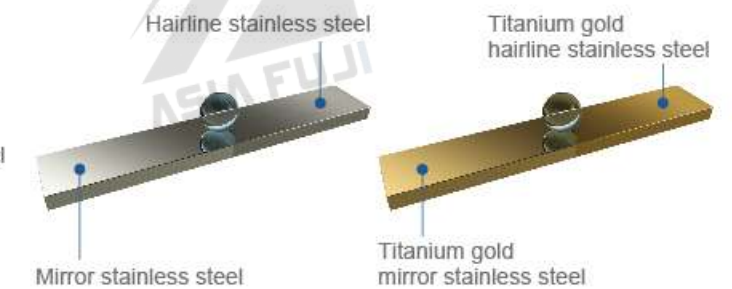


SFJ-Z201

(Boxless/Simplex)



SFJ-Z202

(Boxless/Duplex)

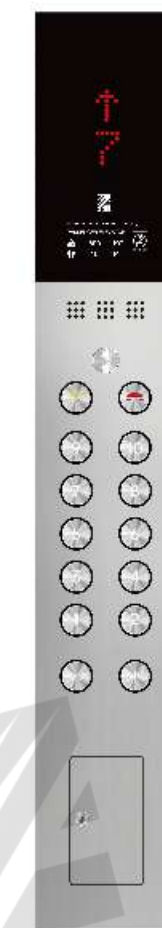

SFJ-C102

Panel Material: Hairline Stainless Steel

Button: Stainless Steel

Screen: Dot Matrix Display



SFJ-Z109

(Boxless)



SFJ-Z110

(Boxless)

SFJ-C101

Standard configurations

SFJ-C102

Standard configurations

SFJ-C106

Panel Material: Mirror Stainless Steel
On Both Sides + Hairline Stainless Steel
In The Middle
Button: Stainless Steel
Screen: LCD Display



SFJ-C107

Panel Material: Mirror Stainless Steel
On Both Sides + Hairline Stainless Steel
In The Middle
Button: Stainless Steel
Screen: Dot Matrix Display



SFJ-C108

Panel Material: Hairline Stainless Steel
+ Black Glass
Button: Stainless Steel
Screen: Dot Matrix Display



SFJ-C109

Panel Material: Hairline Stainless Steel
Button: Stainless Steel
Screen: Dot Matrix Display



SFJ-C111

Panel Material: Hairline Stainless Steel
+ Black Glass
Button: Stainless Steel,
Black Acrylic
Screen: LCD Display



SFJ-C110

Panel Material: Hairline Stainless Steel
Button: Stainless Steel
Screen: Dot Matrix Display



SFJ-C112

Panel Material: Black Glass
Button: Touch Type
Screen: Multimedia Display



Direction lantern

SFJ-L01-A

Milky White Acrylic
Stainless Steel

Integrated Lantern


DC 24V/12V
Front panel repair
White/Warm White Glowing
DC 24V/12V

SFJ-L01-B

Milky White Acrylic Mirror

Integrated Lantern

DC 24V/12V
Front panel repair
White/Warm White Glowing
DC 24V/12V



SFJ-L01


3T Stainless Steel Panel
Transparent/Creamy Acrylic
Front panel repair

SFJ-L02

Milky White Acrylic Mirror
Surface printing arrow
Front panel repair

SFJ-L03

Box-less Lantern, front panel repair
Hairline stainless steel bottom plate
Milky White Acrylic



SFJ-L04

Wall-Mounted Arrival Light,
Front Panel Repair
Stainless Steel Panel
Transparent Acrylic

SFJ-L05

3T Stainless Steel Panel
Transparent/Creamy Acrylic
Front Panel Repair

SFJ-L06

Box-less Lantern, Front Panel Repair
Stainless Steel
Transparent Acrylic

Handicapped COP



SFJ-C114

Panel material: Hairline Stainless Steel
Button: Stainless Steel

LCD indicator

- Customer main menu or video display
- Elevator moving direction
- Elevator floor signal
- Elevator fixed message display area (overload, inspection and etc)
- Instant time
- Advertisement



4.3 inch



7 inch



8 inch



10.4 inch



To be installed on the side of cabin



Landing Door Decoration



SFJ-T101 (standard)
Landing Door: Painted Stainless Steel



SFJ-T102 (standard)
Landing Door: Hairline Stainless Steel




SFJ-T103
Landing Door: Hairline Stainless Steel, Etched, Mirror Stainless Steel



SFJ-T104
Landing Door: Hairline Stainless Steel, Etched



SFJ-T105
Landing Door: Hairline Stainless Steel, Etched, Mirror Stainless Steel

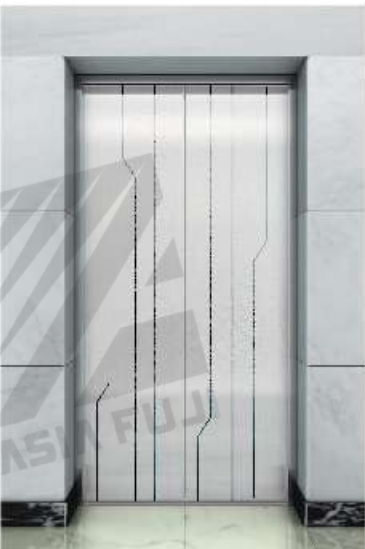

SFJ-T106
Landing Door: Hairline Stainless Steel, Etched, Mirror Stainless Steel



SFJ-T107
Landing Door: Hairline Stainless Steel, Etched, Mirror Stainless Steel



SFJ-T108
Landing Door: Bronze Mirror Stainless Steel, Etched



SFJ-T109
Landing Door: Bronze Mirror Stainless Steel, Etched



SFJ-T110
Landing Door: Bronze Mirror Stainless Steel, Etched



SFJ-T111
Landing Door: Black Hairline Stainless Steel, Tempered Safety Glass



SFJ-T112
Landing Door: Golden Hairline Stainless Steel, Tempered Safety Glass

Landing Door Decoration



SFJ-T114

Landing Door: Hairline Stainless Steel,
Tempered Safety Glass



SFJ-T115

Landing Door: Hairline Stainless Steel,
Tempered Safety Glass



SFJ-T116

Landing Door: Hairline Stainless Steel,
Black Titanium



SFJ-T117

Landing Door: Titanium, Mirror
Stainless Steel, Etched



SFJ-T118

Landing Door: Titanium, Mirror
Stainless Steel, Etched





SFJ-T119

Landing Door: Rose Gold, Mirror
Stainless Steel, Etched


Landing Door Jamb Serie




Narrow jamb (standard)

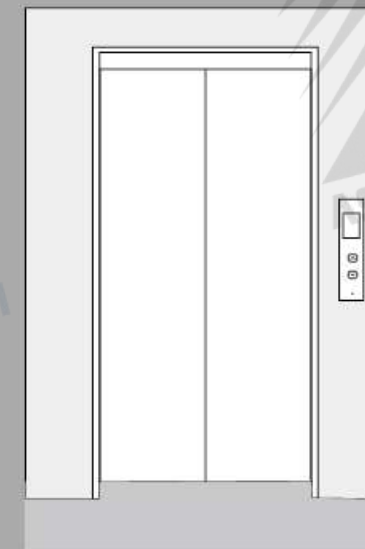


Wide jamb

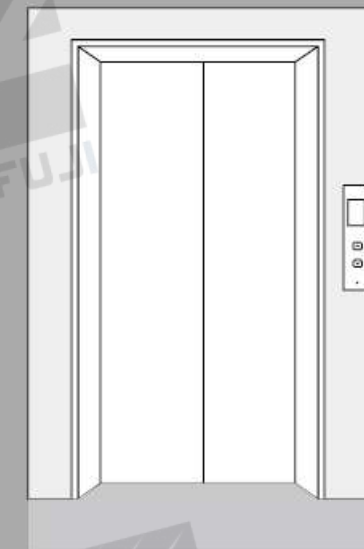

Wide jamb

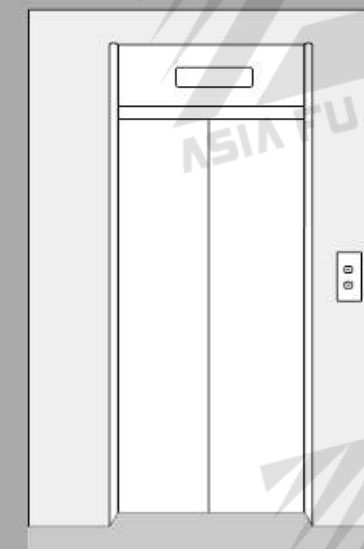

Wide jamb with Transom

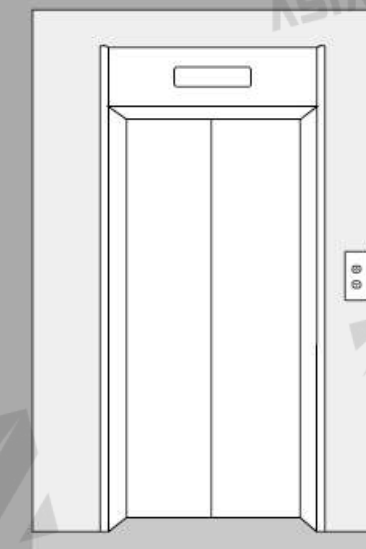

Wide jamb with Transom



Handrail



F001



F002



F003



F004



F005



F006



F007



F008



F009



F010



F011



F012



F013



F014



F015

Ceiling Series




SFG-T101



SFG-T102



SFG-T103

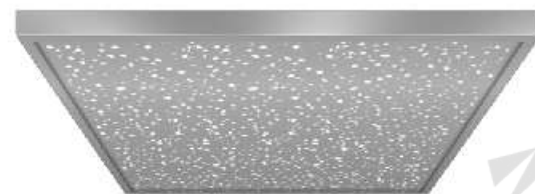

SFG-T104




SFG-T105



SFG-T106



SFG-T107

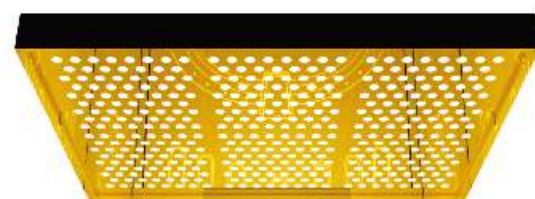

SFG-T108



SFG-T109



SFG-T110



SFG-T111




SFG-T112



SFG-T113



SFG-T114

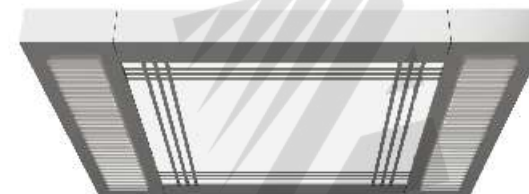

SFG-T115



SFG-T116

Floor Series



SFJ-D01



SFJ-D02



SFJ-D03



SFJ-D04



SFJ-D05



SFJ-D06



SFJ-D07



SFJ-D08



SFJ-D09



SFJ-D10

Color Card Series



SFJ-C105
Light gray



SFJ-C102
Green



SFJ-C103
Marine blue



SFJ-C104
Blue



SFJ-C107
Cream coloured



SFJ-C106
White

Function Table

Standard Function



	VVVF drive	Motor rotating speed can be precisely adjusted to get smooth speed curve in elevator start, travel and stop and gain the good comfort.
	VVVF door operator	Motor rotating speed can be precisely adjusted to get the gentler and more sensitive door machine start/stop.
	Independent running	According to the uses' needs, the elevator cannot respond to outer calling, it only responds to inner command in the car.
	Automatic pass without stop	When the car is crowded with the passengers or the load is close to preset value. The car will automatically pass the calling landing in order to keep maximum travel efficiency.
	Adjust door opening time	Door opening time is apt to the users' demands.
	Reopen with hall call	In the door shutting process, pressing the hall call button can reopen the door.
	Express door closing	When the elevator stops and opens the door, press door-shut button, the door will be closed immediately.
	Car stops and door open	The elevator decelerates and levels, the door only opens after the elevator comes to a complete stop.
	Direct parking	According to distance principle completely, the car can directly level without crawling, it greatly enhances the operation efficiency.
	Duplex control	Two sets of same model elevators can unanimously respond the calling signal through the computer dispatch, in this way, it reduces the passengers' waiting time to the greatest extent and enhances the travel efficiency as well.
	Car arrival gone	Arrival gong in the car top announces passengers the car' s arrival.
	Anti- nuisance	In the light elevator load, when three more commands appear all the registered callings in the car will be canceled, in order to avoid the unnecessary parking.
	Automatic return to home	In low traffic flow, the car which has no call will return to the main floor, shut the door and keep waiting automatically.
	Command register cancel	If floor command button in the car is pressed by mistake, press same button again to cancel the registered command.
	Photocell protection	In the door open and shut period, the door protection device of infrared ray that covers the whole door height is used to probe both the passenger and objects.
	Designated stop	If the elevator cannot open the door in the destination floor out of some reason, the elevator will close the door and travel to the next designated floor.
	Overload holding stop	When the car is overload, the buzzer rings and the elevator remain at rest in the same floor.
	Anti-stall timer protection	The elevator stops operation due to slippery traction wire rope.
	Start protection control	If the elevator does not leave door zone within the designated time after it get started, it gets started, it will stop the operation.
	Inspection operation	When the elevator enters into inspection operation, the car travels at inching running.
	Fault self-diagnosis record	With the help of this record function, faults can be restored rapidly so that the elevator can remove in a short time.
	UP/down over-run and final limit protection	The device can effectively prevent from the elevator' s surging to the top or knocking the bottom when it is out of control. It results in more safe and reliable elevator travel.
	Down over-speed protection	When the elevator downs 1.2 times higher than the rated speed, this device will automatically cut off control mains, the motor running so as to stop elevator down at over-speed. If the elevator continues to down at over-speed, and the speed is 1.4 times higher than rated speed, safety tongs act to force the elevator stop in order to ensure the safety.
	Upward over-speed protection device	When the elevator up speed is 1.2 times higher than rated speed, the device will automatically decelerate or brake the elevator.

	Micro-touch button for car call and hall call	Novel micro-touch button is used for operation panel command button in the car and landing calling button.
	Floor and direction indicator	The car shows the elevator floor location and current travel direction.
	Floor and direction indicator in hall	The landing shows the elevator floor location and current travel direction.
	Emergency car lighting	Emergency car lighting automatically activated once power failure.
	Inching running	When the elevator enters into emergency electric operation, the car travels at low-speed inching running.
	Five-way intercom	Communication amid car, car top, elevator machine room, well pit and rescue duty room through walkie-talkie.
	Fire emergency return	In emergency conditions, if bell button on car operation panel is continuously pressed, electric bell rings on top of the car.
	Fire emergency return	If you start emergency switch in main landing, all the callings will be canceled. The elevator directly and immediately drives to designated rescue landing and automatically opens the door.
	Car ventilation, light automatic shut off	If there is no calling or command signal within the stipulated time, the car fan and lighting will be automatically closed in order to save the energy.

Optional Function

	Leveling when power failure	In normal power failure, the chargeable battery supplies the elevator power, the elevator drives to the nearest landing.
	Group control	The group control system is used when three or more
	function	same model elevators are organized into a group to run, it can make the elevator group automatically choose the most appropriate response, avoid repeated parking, reduce the passengers' waiting time and increase the operation efficiency.
	Energy feedback device	Feeding the energy generated during the elevator running and braking back to reduce the customers' operational cost and environmental pollution.
	Open the door to a flat	When the elevator floor is higher, due to the telescopic steel wire rope, passengers can cause in the process in and out of the car at a car to move up and down, leading to a flat, the system detected after this kind of situation will leave the door open with a lower speed make capsules flat layer.
	Door open time extending	Press special button in the car, the elevator door keeps open for certain period of time.
	Voice announcer	When the elevator normally arrives, voice announcer informs the passengers about the relevant information.
	Car arrival ring	Arrival gong in the car top announces passengers the car' s arrival.
	Car assistant operation box	It is the large loading weight elevator or the elevator with crowded passengers so that most of the passengers can operate the car easily.
	Intelligent calling service	Destination floor calling can be fulfilled through special intellectual input device.
	Operation box for the handicapped	It is convenient for the wheelchair passengers and those who have vision problems.
	IC card control function	All (partial) landings can only input car commands through IC card after the authorization.
	Remote monitor	The remote monitor of elevator can be fulfilled through modem and telephone. It is convenient for the makers and service units to know the travel conditions of every elevator and take corresponding measures promptly.
	Remote control	Based on remote monitor, it is capable to remote control some functions which do not affect safety of elevator' s operation, such as making elevators, which are under the duplex or group control, operate independently as required.
	Camera function in the car	The camera is installed in the car to monitor the car conditions.

Small Machine Room-Rear Civil Plan

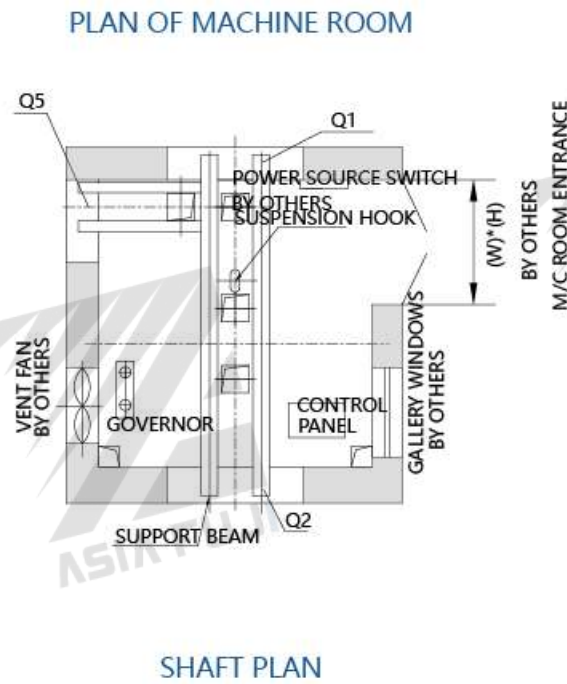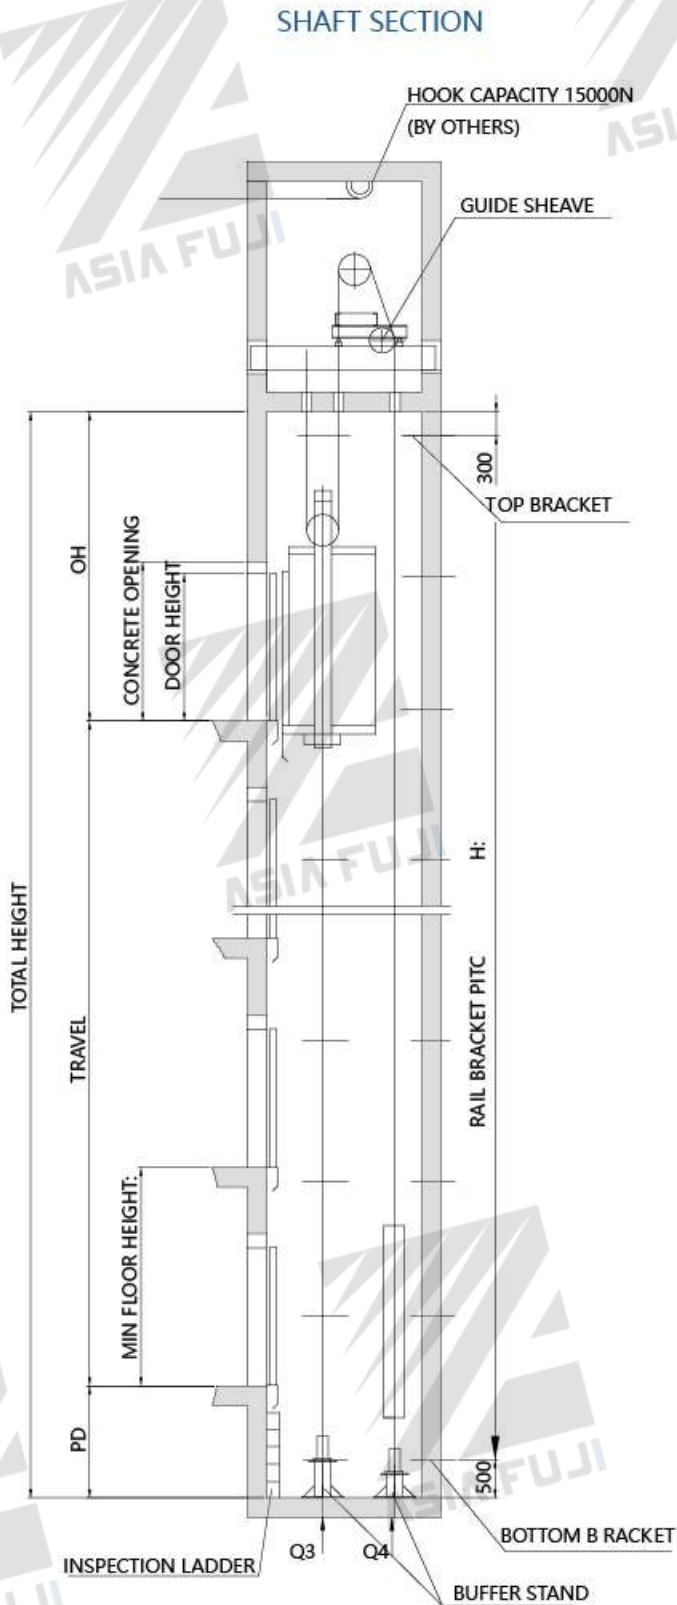


The user's tasks

- 1、 It makes the drawing according to the relevant lift technical standard. It needs to be checked and confirmed by the user before it becomes the lift installation proof.
- 2、 It shall have one above 50mm step with the proper width around the holes that lead to the well in side the machine room.
- 3、 After the installation completion, the ground decoration shall have a proper height step in the sill surface to prevent water or other impurity from entering into the well.
- 4、 The casting object in the installation shall satisfy the relevant drawing requirements.
- 5、 The buffer base shall be made under the directions of the installers.


Capacity		Speed	Car Size			Shaft Size		E(mm)	F(mm)	OH(mm)	P(mm)
Persons	kg	(m/s)	A(mm)Width	B(mm)Width	G(mm)Height	C(mm)Width	D(mm)Depth	Gate Width	Gate Height	Top layer altitude	Bottom depth
6	450	1.0	1100	1100	2500	1800	1800	800	2100	4300	1400
		1.5								4400	1500
		1.75								4500	1600
8	630	1.0	1400	1100	2500	2000	1800	800	2100	4300	1400
		1.5								4400	1500
		1.75								4500	1600
10	800	1.0	1400	1400	2500	2000	2100	800	2100	4300	1400
		1.5								4400	1500
		1.75								4500	1600
		2.0								4800	1800
13	1000	1.0	1600	1500	2500	2200	2200	900	2100	4300	1400
		1.5								4400	1500
		1.75								4500	1600
		2.0								4800	1800
		2.5				2300	2300			5200	2200
		3.0								5600	3200
		4.0								5800	3800
15	1150	1.0	1700	1500	2500	2300	2200	900	2100	4300	1400
		1.5								4400	1500
		1.75								4500	1600
		2.0								4800	1800
		2.5				2400	2300			5200	2200
		3.0								5600	3200
		4.0								5800	3800

Small Machine Room-Side Civil Plan

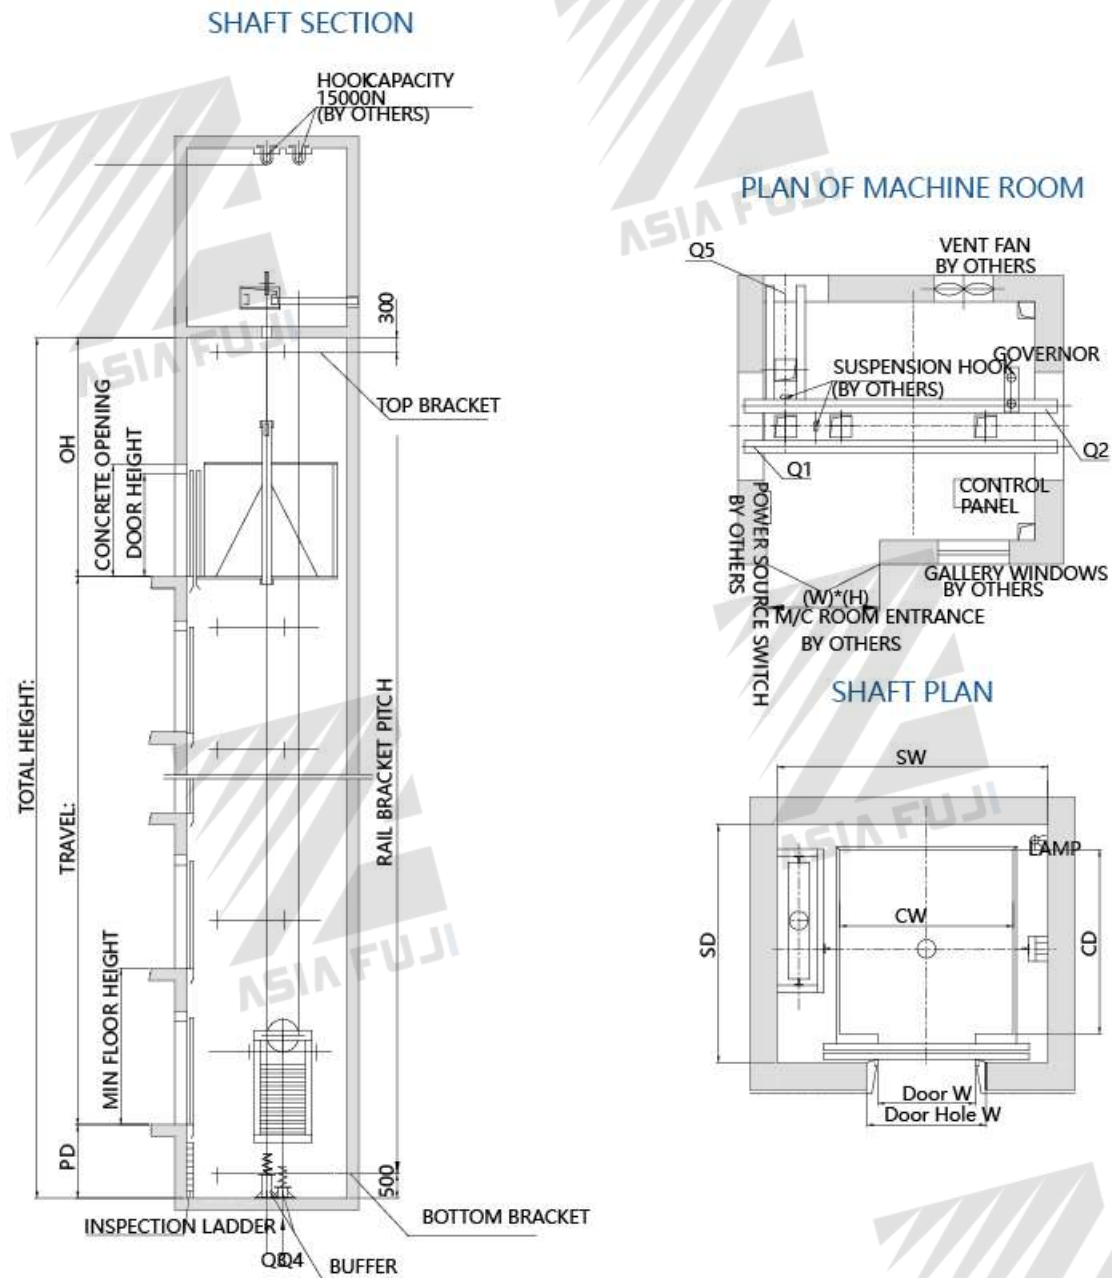


Capacity		Speed	Car Size			Shaft Size		E(mm)	F(mm)	OH(mm)	P(mm)
Persons	kg	(m/s)	A(mm)Width	B(mm)Width	G(mm)Height	C(mm)Width	D(mm)Depth	Gate Width	Gate Height	Top layer altitude	Bottom depth
16	1250	1.0	1600	1700	2500	2500	2200	900	2100	4300	1400
		1.5								4400	1500
		1.75								4500	1600
		2.0				2600	2300			4800	1800
		2.5								5200	2200
		3.0								5600	3200
4.0	5800	3800									
18	1350	1.0	1700	1700	2500	2600	2200	900	2100	4300	1400
		1.5								4400	1500
		1.75								2700	2300
		2.0				4800	1800				
		2.5				5200	2200				
		3.0				5600	3200				
4.0	5800	3800									
21	1600	1.0	1400	2400	2500	2400	3000	1000	2100	4300	1400
		1.5								4400	1500
		1.75								4500	1600
		2.0				2500	3100			4800	1800
		2.5								5200	2200
		3.0								5600	3200
4.0	5800	3800									

Machine Roomless Civil Plan

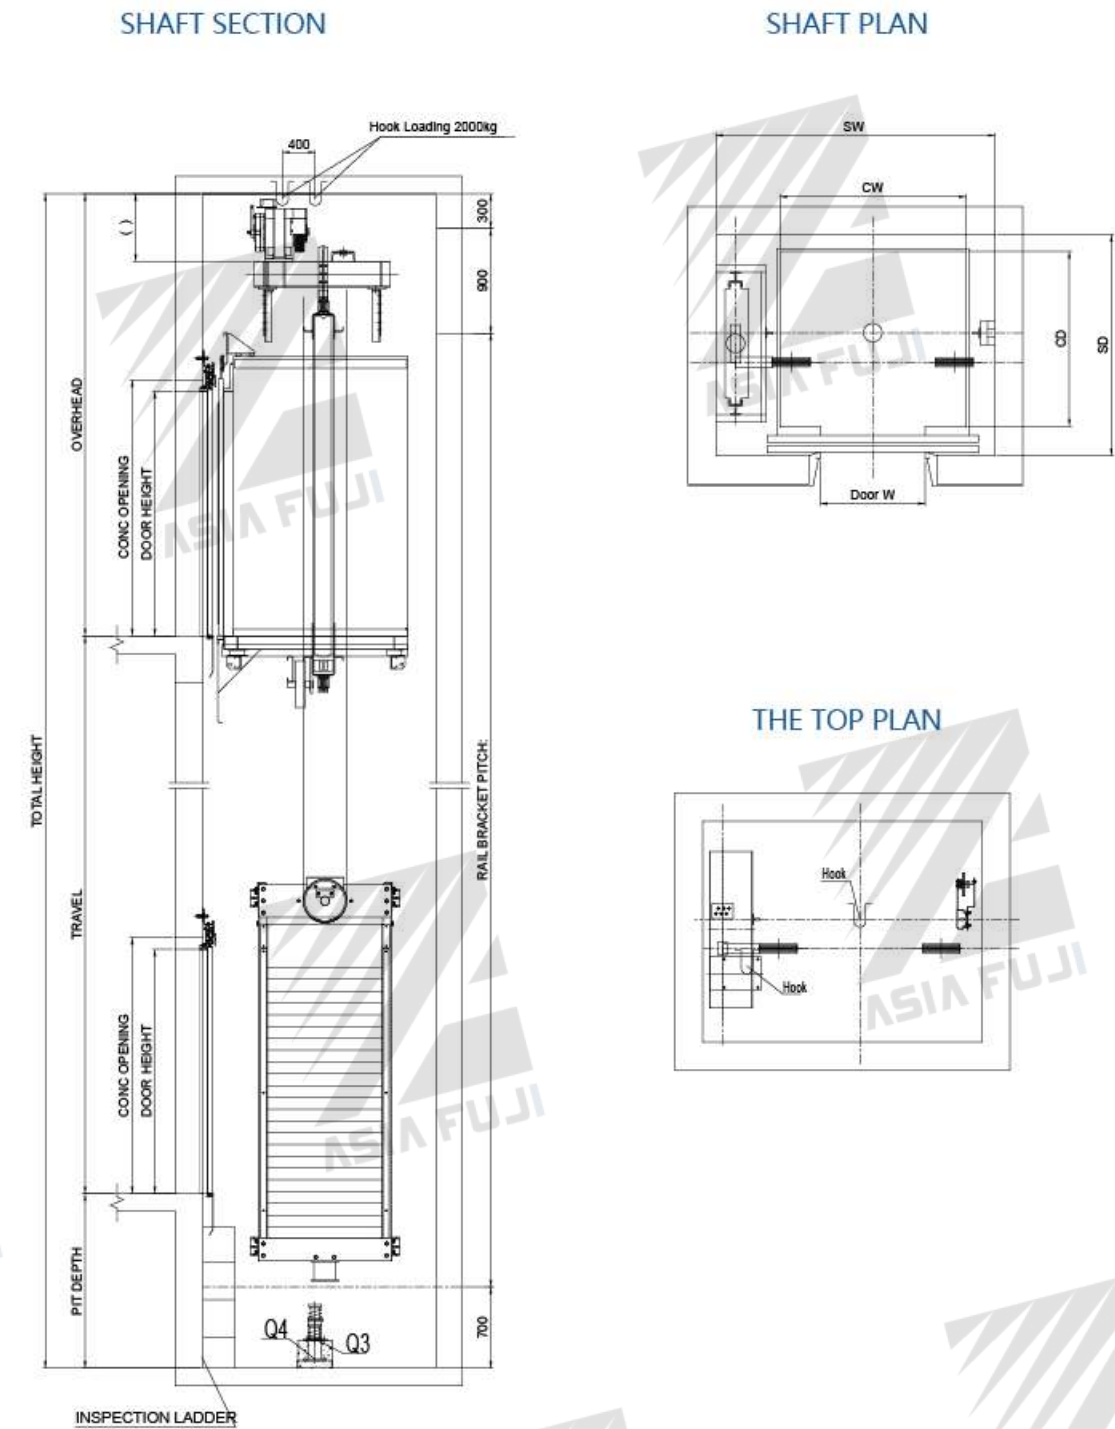


Capacity		Speed (m/s)	Car Size			Shaft Size		E(mm) Gate Width	F(mm) Gate Height	OH(mm) Top layer altitude	P(mm) Bottom depth
Persons	kg		A(mm)Width	B(mm)Width	G(mm)Height	C(mm)Width	D(mm)Depth				
6	450	1.0	1100	1100	2500	2000	1700	800	2100	4200	1500
		1.5								4300	1600
8	630	1.0	1100	1400	2500	2000	1900	800	2100	4400	1700
		1.5								4500	1800
10	800	1.0	1400	1400	2500	2300	1900	800	2100	4200	1500
		1.5								4300	1600
13	1000	1.0	1600	1400	2500	2500	1900	900	2100	4400	1700
		1.5								4500	1800

Hospital Elevator Civil Plan

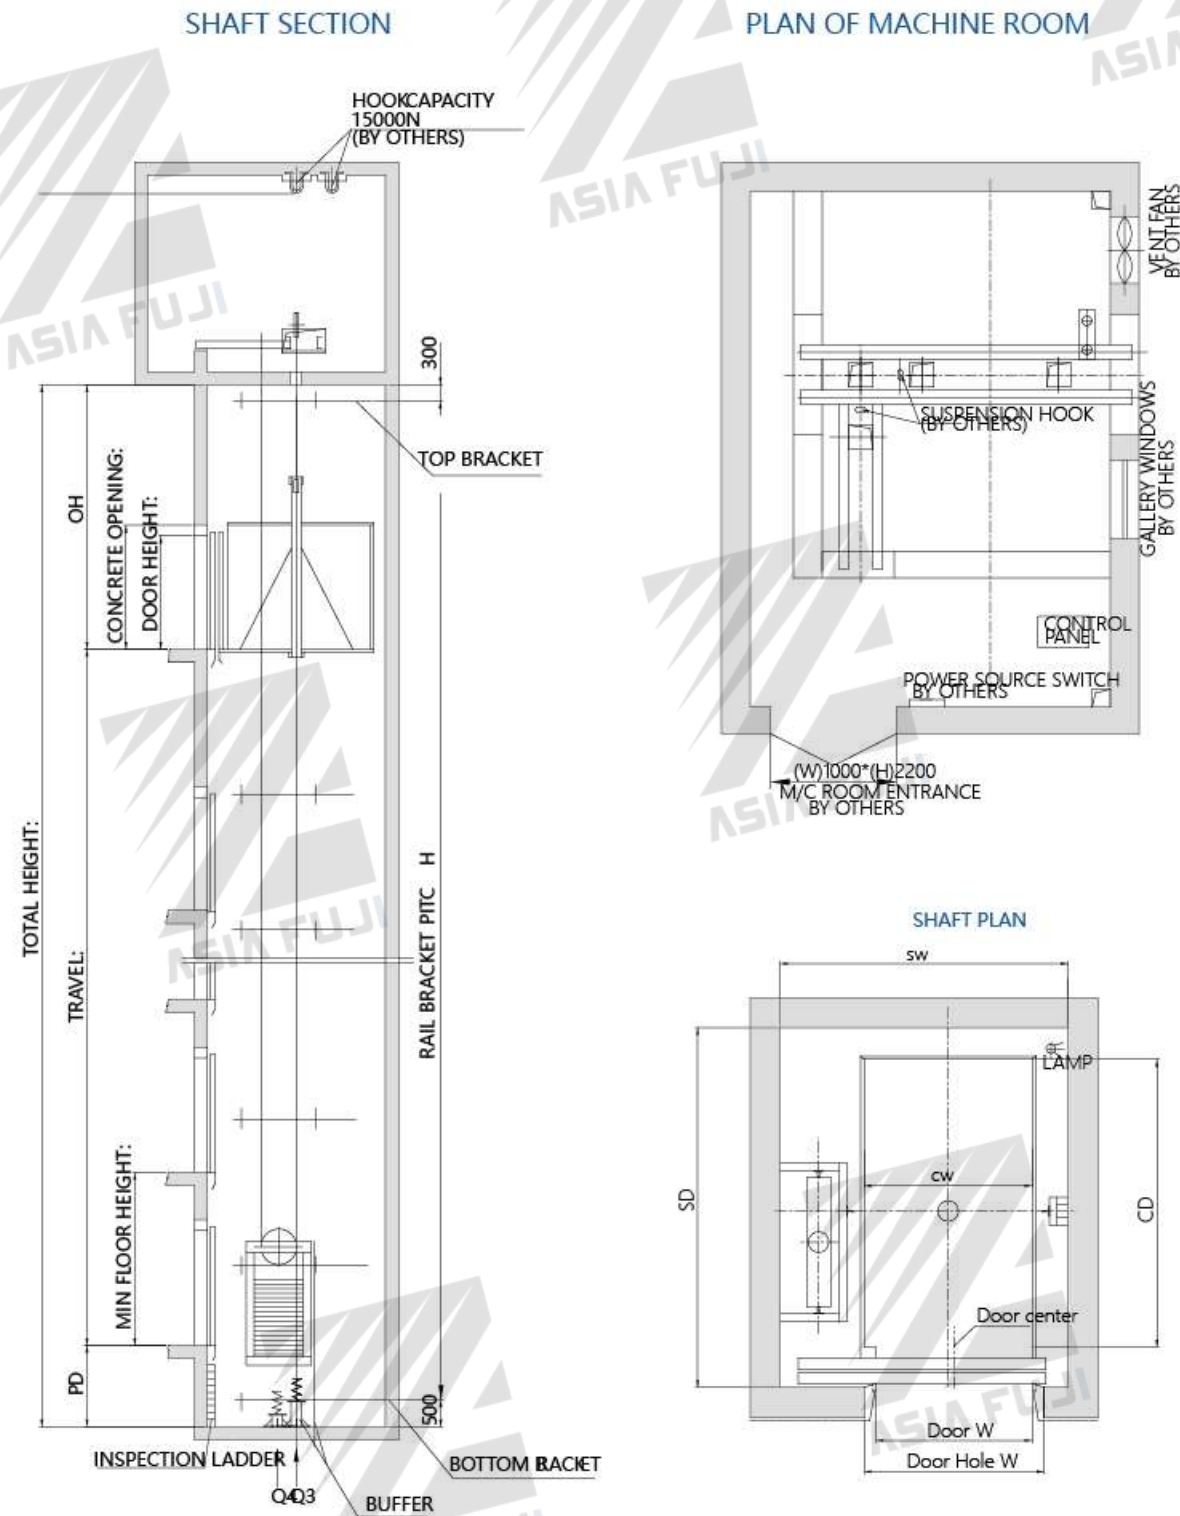


Capacity		Speed (m/s)	Car Size			Shaft Size		E(mm) Gate Width	F(mm) Gate Height	OH(mm) Top layer altitude	P(mm) Bottom depth
Persons	kg		A(mm)Width	B(mm)Width	G(mm)Height	C(mm)Width	D(mm)Depth				
13	1000	1.0	1100	2100	2500	2200	2600	900 CO	2100	4300	1400
		1.5								4400	1500
		1.75								4500	1600
21	1600	1.0	1400	2400	2500	2400	2900	1300 SO	2100	4300	1400
		1.5								4400	1500
		1.75								4500	1600

Machine Roomless Hospital Elevator Civil Plan

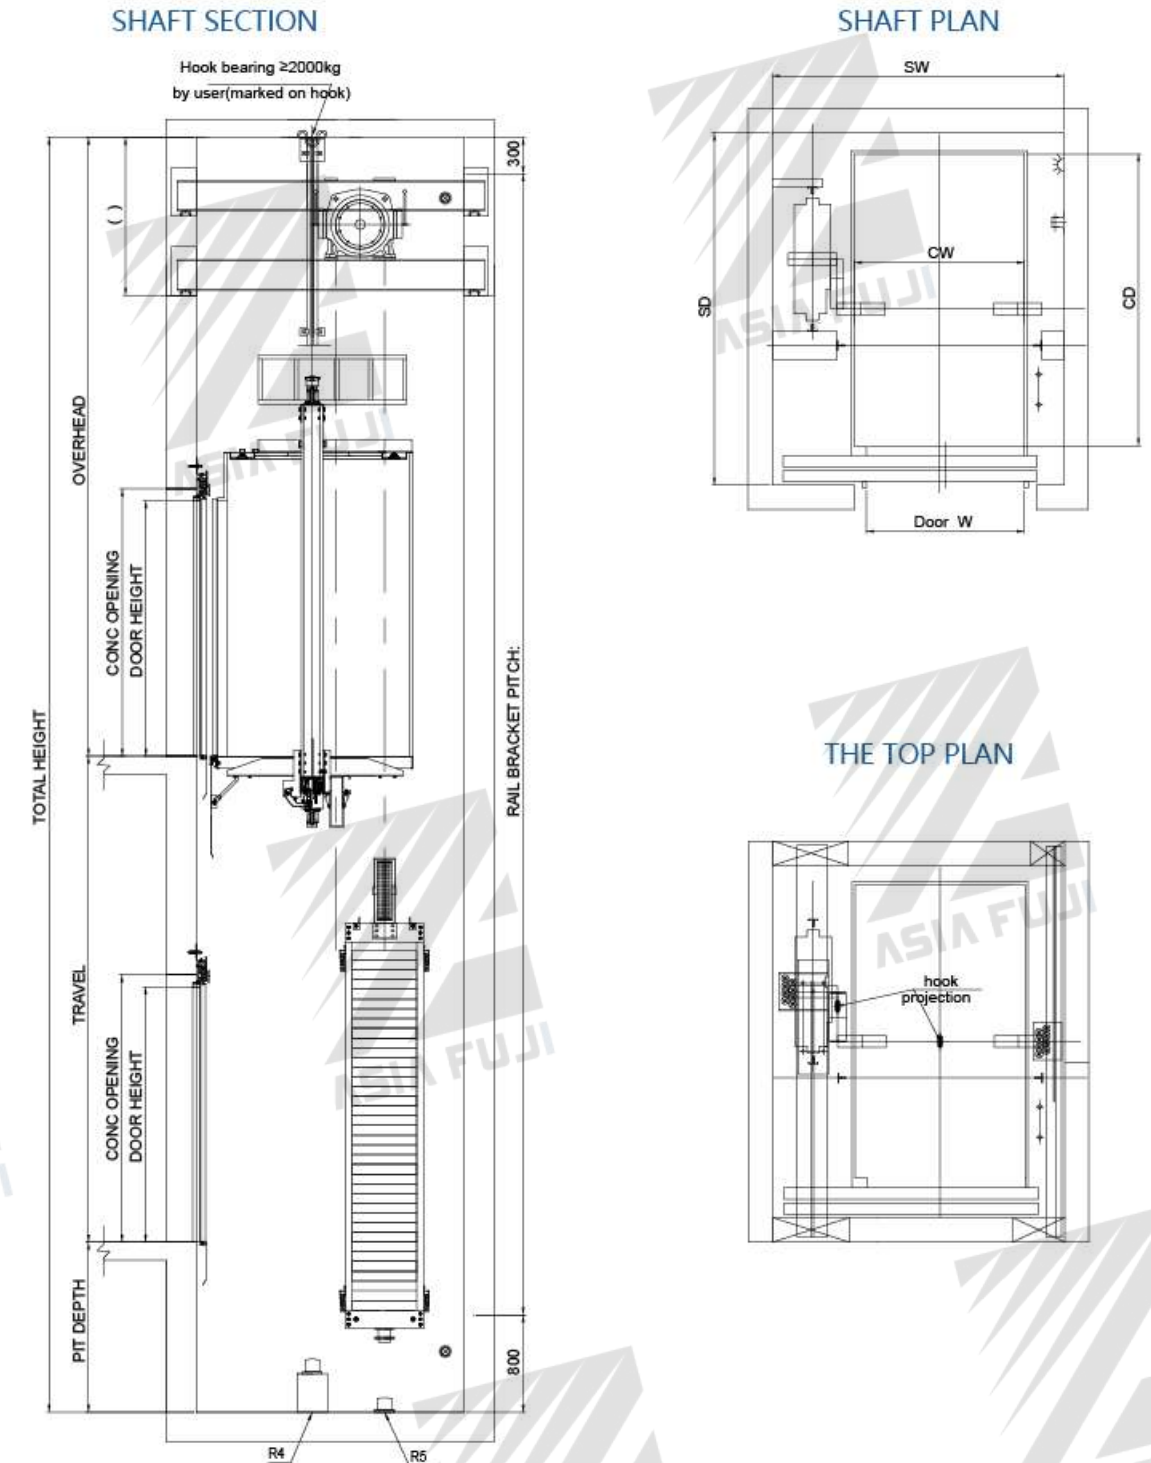


Capacity		Speed (m/s)	Car Size			Shaft Size		E(mm) Gate Width	F(mm) Gate Height	OH(mm) Top layer altitude	P(mm) Bottom depth
Persons	kg		A(mm)Width	B(mm)Width	G(mm)Height	C(mm)Width	D(mm)Depth				
18	1350	1.0	1400	2200	2500	2400	2800	1300 SO	2100	4800	1700
		1.5								5000	1800
		1.75								5100	1900
21	1600	1.0	1400	2400	2500	2400	2900	1300 SO	2100	4800	1700
		1.5								5000	1800
		1.75								5100	1900


Panoramic Elevator Civil Plan

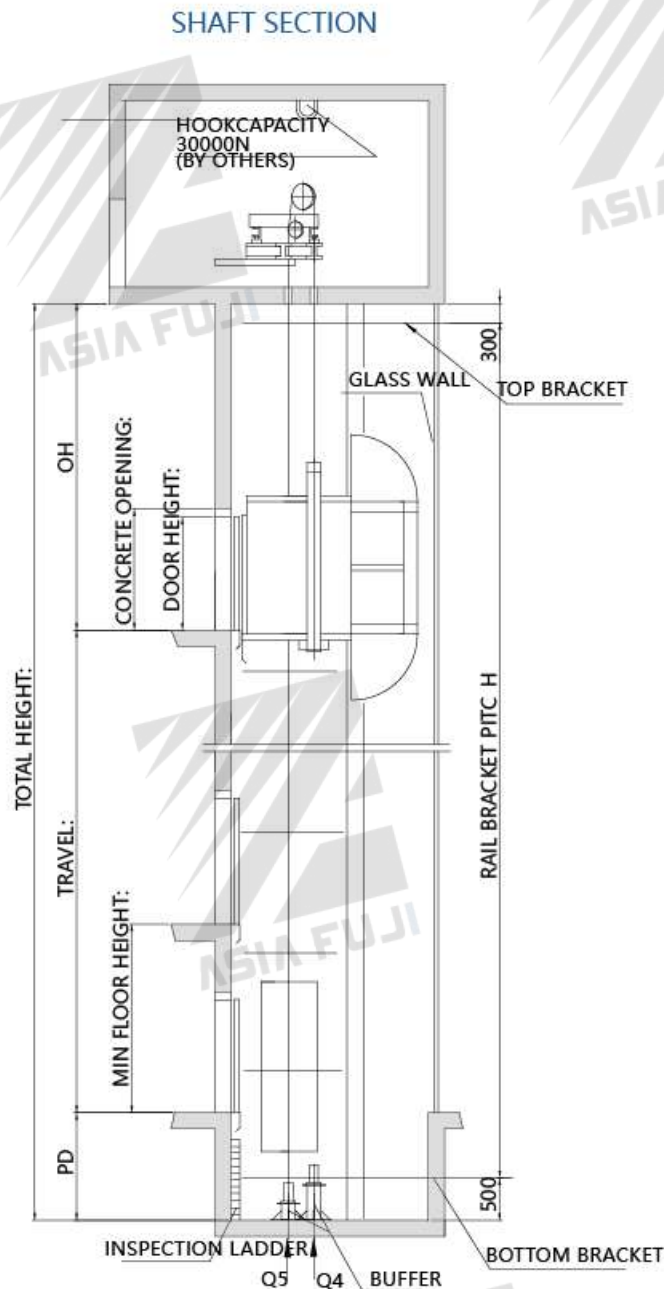

PLAN OF MACHINE ROOM

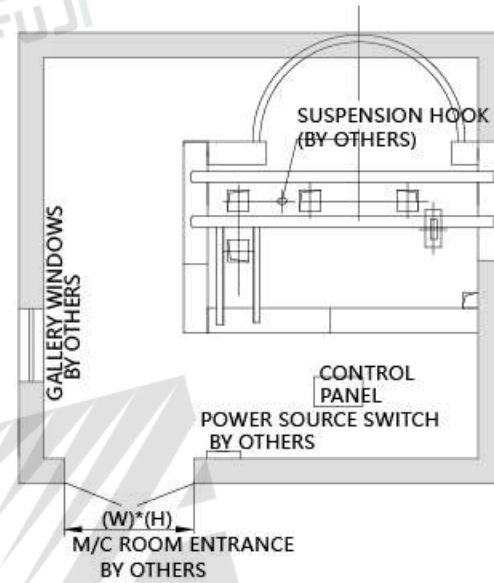


SHAFT PLAN

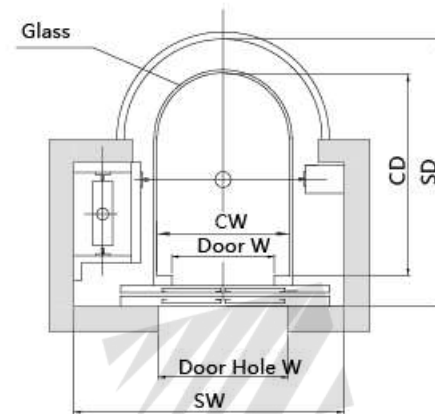


Capacity		Speed	Shape	Car Size			Shaft Size		E(mm)	F(mm)	OH(mm)	P(mm)
Persons	kg	(m/s)		A(mm)Width	B(mm)Width	G(mm)Height	C(mm)Width	D(mm)Depth	Gate Width	Gate Height	Top layer altitude	Bottom depth
6	800	1.0	Hexagon Half circle	1200	1800	2500	2350	2400	800	2100	4800	1800
		1.5									4900	1900
		1.75									5000	1900
8	1000	1.0	Hexagon Half circle	1300	1900	2500	2450	2450	900	2100	4800	1800
		1.5									4900	1900
		1.75									5000	1900
10	1250	1.0	Hexagon Half circle	1300	2150	2500	2450	2700	900	2100	4800	1800
		1.5									4900	1900
		1.75									5000	1900
13	1350	1.0	Hexagon Half circle	1500	2100	2500	2650	2650	900	2100	4800	1800
		1.5									4900	1900
		1.75									5000	1900
15	1600	1.0	Hexagon Half circle	1600	2300	2500	2750	2900	900	2100	4800	1800
		1.5									4900	1900
		1.75									5000	1900

Machine Roomless Panoramic Elevator Civil Plan


SHAFT VERTICAL PLAN

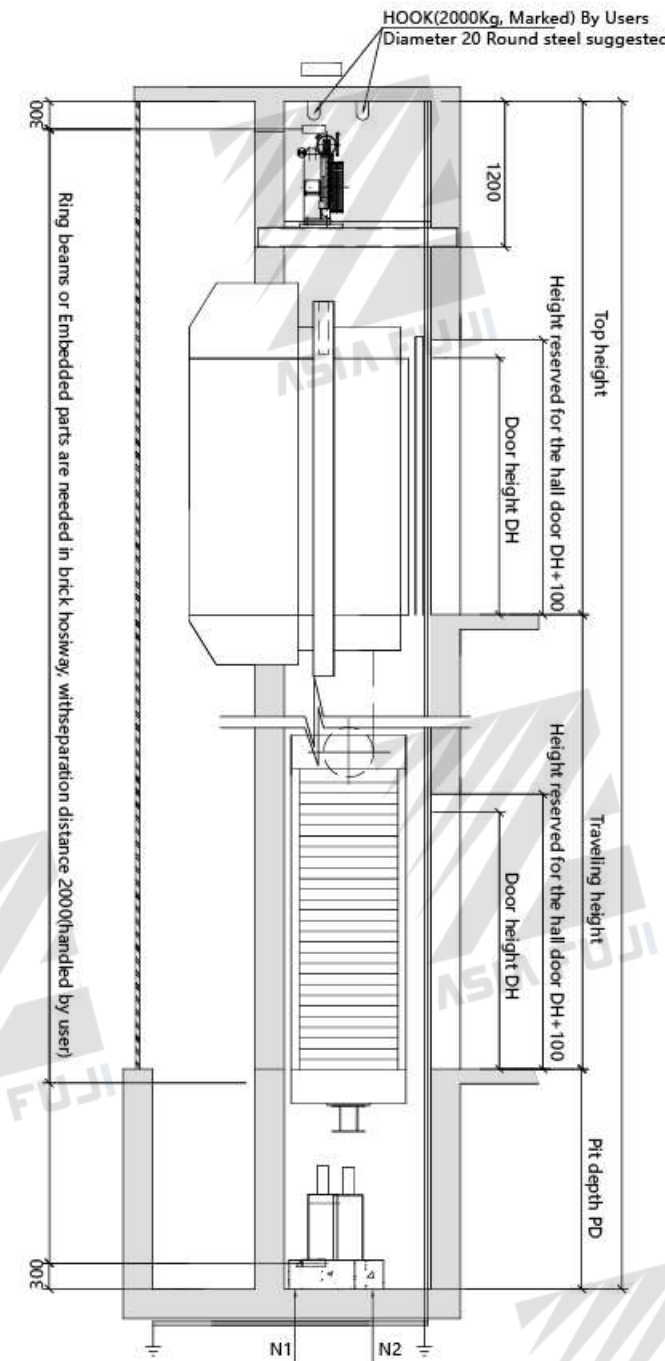


SHAFT PLAN VIEW

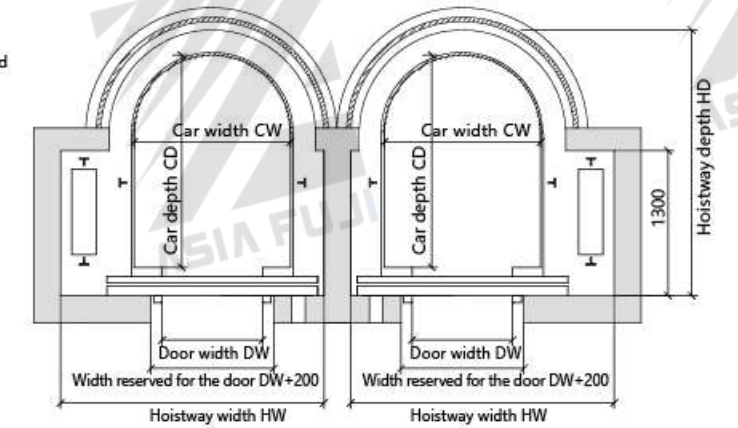

SHAFT PLAN VIEW

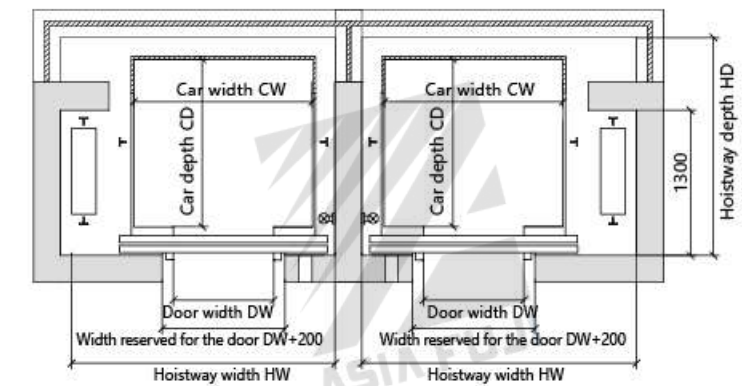

SHAFT PLAN VIEW

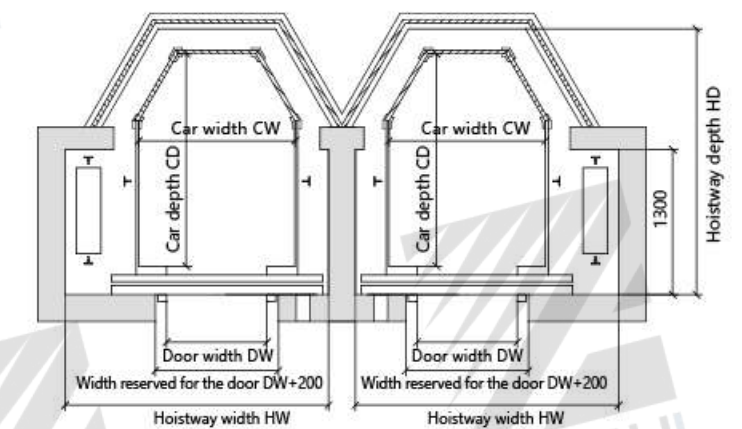

Capacity		Speed	Car Size			Shaft Size		E(mm)	F(mm)	OH(mm)	P(mm)
Persons	kg	(m/s)	A(mm)Width	B(mm)Width	G(mm)Height	C(mm)Width	D(mm)Depth	Gate Width	Gate Height	Top layer altitude	Bottom depth
10	800	1.0	1200	1800	2500	2250	2400	800	2100	4800	1800
		1.5								4900	1900
		1.75								5000	1900
13	1000	1.0	1300	1900	2500	2340	2500	900	2100	4800	1800
		1.5								4900	1900
		1.75								5000	1900

After-sale Service



Professional team



Service line



Convenient service



Professional maintenance

Offering best solution

We firmly believe that superior quality is not the only factor to make a product reach a perfect level. Only with a high-standard service assurance can truly create the maximum value for our customers and customers can indeed enjoy the beyond-value service brought by this product. With the service concept of "ubiquitous service, all for customers", we provide after-sale service guarantee for 24 hours a day, 365 days a year.

Standardization: Globally unified service standard, designed to provide you with professional services

Professionalization: Well-trained service team to provide you with a full range of service solutions

Systematization: Strict and complete service process to ensure perfect service is close to you

Personalization: Hierarchical service scheme, close to your needs, win value for you



Contact phone: 8558-3300, 7013-7300